



A new standard of performance that exceeds your expectations

Digital duplicator

RISO SF5450

Ledger/150 ppm/300  $\times$  600 dpi/LCD panel/ Versatile connectivity

### Introducing the SF series, the all-new global brand that meets all kinds of user needs

Employed in over 180 countries and regions, RISO has been successfully meeting all user needs by constantly listening to the feedback from our customers in order to continually improve our products. The SF series is an important milestone and a masterpiece of our ceaseless innovation. With the fastest speed in its class plus the superior operability and print quality, the SF series ushers you into a higher dimension of printing.







**High Definition** 

300 x 600 dpi High-resolution



**RISO** *SF5450* 

"Since print volume is normally very large, time and costs are major concerns."

# RISO offers outstanding productivity through high speed and low cost.



### **High-speed 150 ppm printing**

Achieving 1000 pages printed in approx. 7 minutes, this is the world's fastest printing speed in this range. This surprisingly rapid rate will efficiently support your heavy paperwork requirements.



#### Quick Master Making mode NEW

A new function, speed priority mode, shortens the master-making time while still maintaining high image quality.

#### **Heavy-load paper feeding**

The paper trays have a capacity of 1000 sheets\* for both feeding and receiving, which ensures uninterrupted printing over a longer period.



\*When using the following weight of paper: 17-lb bond to 21lb-bond




#### **Overwhelmingly economical print costs**

The SF series makes prints from a master. As a result, the more pages generated from each master the lower the cost per print,  $\frac{1}{2} \left( \frac{1}{2} \right) = \frac{1}{2} \left( \frac{1}{2} \right) \left( \frac{1}{$ 

making it highly economical for medium- to highvolume printing.




#### Print quantity and cost per print



#### **Paper saving**

Page layout printing combines multiple copies of the same page, or copies of multiple pages onto a single printed page to save paper. Conveniently condense bulky multiple-page documents in an easy-to-read format. These functions are available when using the printer driver.



#### Versatile paper handling capability

The SF series plays multiple roles, accepting a wide range of paper types such as recycled paper, coarse paper, cards and envelopes.

#### Easily adjustable receiving tray Improved

The receiving tray can be adjusted easily with a click feeling for each standard paper size. Improved design allows printed papers to settle in an orderly way for smooth pickup.



## "Aren't digital printers difficult to operate?"

# No need to worry. Operation is easy for everyone.




#### Redesigned control panel Improved

New, easy-to-use control panel provides intuitive operation.

#### Easy-to-use LCD panel NEW

The information on the  $128 \times 64$  dot LCD panel can be easily viewed, and it also shows the residual capacity of supplies to prevent an out-of-stock situation occurring.



#### Various printing approaches

The SF series offers various ways of printing, depending on your specific requirements.

- Standard equipment of PC-I/F
- Direct printing from a USB flash drive




#### RISO console NEW

The total management system improves convenience by integrating applications in one place. Product, consumables and system information can all be checked easily on your PC.



#### **Versatile program print**

For example, you can print question papers for three different classes, A, B and C, that contain different numbers of students. Simply set up the program, place the three original tests in the Auto Document Feeder and press "print" — you'll automatically receive the required numbers of each individual test.

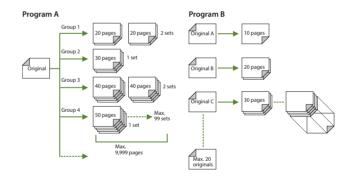



"We don't want to compromise the beauty of the finish."

### Images and text can be printed with outstanding quality.



### High image quality $300 \times 600$ dpi printing

This achieves sharp and clear output with the higher image quality.

#### **Enhanced features for clearer output**

#### High scanning quality NEW

The newly designed scanner attains smooth tonal gradation even with photo images.

• Reduced blown-out highlights via equalized dot description

#### Improved image-processing function | Improved

Decreases image deterioration through improved image processing, delivering clearer output.

- Minimizes blocked-up shadows through enhanced gamma correction
- Sharp outlines with contour enhancement achieved

#### **Ink color variations**

21 standard colors plus 50 custom colors are available. A wide range of printing colors can meet the needs of a variety of print jobs.

Red	Bright Red	RISO- Marine Red	Burgundy	Brown	Yellow	Green
Teal	Blue	Medium Blue	RISO-Fed. Blue	Purple	Flat Gold	Orange
Crimson	Hunter Green	Gray	Light Gray	Fluorescent Pink	Fluores. Orange	Gold

[Custom colors]


300 × 600 dpi

#### Other various functions for optimum output

- Auto base control
- Tone smooth function
- Four image-processing modes: Line, Photo, Duo, and Pencil





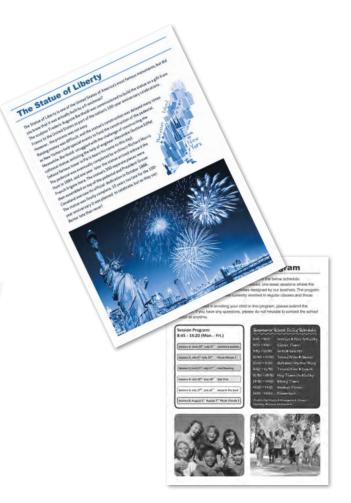

"How can we manage the information and consumables."

# We support information and consumables management.



#### **IC** card security

Enhanced security by an optional IC card activation kit. Only an authorized user can perform printing, effective to prevent divulging information from secret documents.



#### **Usage report**

The SF series provides RISO Copy Count Viewer for counting users' printouts, useful for understanding expenses and usage restriction. The aggregate results are available via printout, USB flash drive or email.

"Ecology is an important concern to us all."

## We strongly care about global environmental issues as well.

#### **Eco-friendly**


The SF series consumes 1/10th the energy, compared with energy star guidelines.

- ENERGY STAR® qualified and RoHS certified
- Complies with the ErP directive in Europe
- Consumes less power and produces less heat
- Energy-saving system



#### Rice bran oil ink NEW

The rice bran oil ink contributes to environment sustainability. Rice bran, which would be otherwise wasted, is a raw material with no VOCs, so after the oil is extracted for the ink. It can subsequently be used as fertilizer or animal feed.

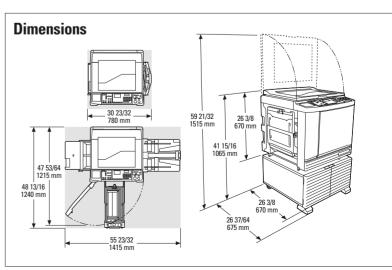

#### **Optional Accessories**



RISO SF Drum



RISO Auto Document Feeder VII



Job Separator IV; NIII



Card Feed Kit



RISO Stand D Type III Deluxe and with doors for convenient storage with a neat appearance.



RISO Stand N Type III Sturdy open-front stand also offers convenient storage of consumables.

- IC Card Reader Activation Kit RG
- . RISO Printer driver for Macintosh

### RISO i Quality System™ The RISO i Quality mark indicates a RISO product compatible with the RISO i Quality System.



RISO INK F Type Color (1000 ml)







RISO MASTER F Type (Ledger: 215 sheets)

RISO INK F Type (1000 ml)

#### **Specifications**

RISO Key Card Counter

IV; N

- p						
Master Making/Printing Methods		High-speed digital master-making/Fully automatic printing				
Original Type		Book or sheet				
Master Making Time*1	Quick Master Making mode	- Approx. 15 seconds (Letter, long-edge feed) - Approx. 17 seconds (Letter, short-edge feed)				
	Normal master making mode	- Approx. 17 seconds (Letter, long-edge feed) - Approx. 19 seconds (Letter, short-edge feed)				
Resolution	Scanning	600 dpi × 600 dpi				
	Printing	300 dpi × 600 dpi, Quick Master Making mode: 300 dpi × 400 dpi				
Maximum Scanning Area		11 11/16 inches × 17 inches (297 mm × 432 mm)				
Print Paper Weight		12-lb bond to 116-lb index (46 gsm to 210 gsm)				
Print Paper Size		3 15/16 inches × 5 13/16 inches to 12 7/32 inches × 17 inches (100 mm × 148 mm to 310 mm × 432 mm)				
Maximum Printing Area		11 15/32 inches × 16 23/32 inches (291 mm × 425 mm)				
Paper Feed Tray Stacking Capacity		1000 sheets*2, stacking height of 4 11/32 inches (110 mm) or lower				
Paper Receiving Tray Stacking Capacity		1000 sheets*2, stacking height of 4 11/32 inches (110 mm) or lower				
Print Speed		6 levels: 60, 80, 100, 120, 130, and 150 ppm <sup>+3</sup>				
Print Position Adjustment		Horizontal: ±19/32 inches, Vertical: ±13/32 inches (Horizontal: ±15 mm, Vertical: ±10 mm)				
Image Processing Mode		Line, Photo, Duo, Pencil				
Print Reproduction Ratio		Type: inch Zoom: (50% to 200%), Free, 100% reduction ratio, 3 levels of enlargement (154%, 129%, 121%), 4 levels of reduction (94%, 78%, 65%, 61%) Type: mm Zoom: (50% to 200%), Free, 100% reduction ratio, 3 levels of enlargement (141%, 122%, 116%), 4 levels of reduction (94%, 87%, 82%, 71%)				
User Interface		LCD panel				
Functions		Original Scanning mode, Scanning Level, Enlargement/Reproduction, Dot Process, 2-Up, Book, Ink Saving, Quick Master Making, ADF-Semi-Auto*4, Speed, Density, Print Position, Program A/B, Job Separation*4, Idling, Confidential, Meter Display, Count Report Output, Proof, Direct Printing, USB Flash-via-Printing, Auto Sleep Setting, Auto Power-OFF Setting, ECO mode, RISO iQuality System				
Ink Supply		Full automatic (1000 ml/cartridge)				
Master Supply/Disposal		Full automatic (Ledger: approx. 215 sheets per roll)/Disposal capacity: approx. 100 sheets				
Power Source		AC 100-240 V, 50-60 Hz <3.4-1.6 A>				
Power Consumption	Standard	Max.: 300 W, Ready: 20 W or lower, Sleep: 5 W or lower, Power-OFF: 0.5 W or lower				
	Optional Accessories Connected*5	Max.: 315 W, Ready: 30 W or lower, Sleep: 10 W or lower, Power-OFF: 0.5 W or lower				
Dimensions (W×D×H)	In use	55 23/32 inches × 26 3/8 inches*6 × 41 15/16 inches*7 (1415 mm × 670 mm*6 × 1065 mm*7)				
	In storage	$30\ 23/32\ inches \times 26\ 3/8\ inches^{*6} \times 41\ 15/16\ inches^{*7}\ (780\ mm \times 670\ mm^{*6} \times 1065\ mm^{*7})$				
Required Space (W×D×H)		55 23/32 inches × 48 13/16 inches × 59 21/32 inches*7 (1415 mm × 1240 mm × 1515 mm*7)				
Weight		223 lb (101 kg)*8				
Safety Information		IEC-60950-1 compliant, indoor, pollution degree 2*9, at altitudes of 2000 m or lower				

- \*1 Measurement value when set to 100% reproduction ratio.
- \*2 When using the following weight of paper: 17-lb bond to 21-lb bond (64 gsm to 80 gsm)
  \*3 If the temperature of the inside of the print drum (cylinder) is less than 59°F (15°C), [150 ppm] is not usable. \*4 Optional accessories required.
- \*5 When all the following optional accessories are installed, Auto Document Feeder, Job Separator, Key/Card Counter.
  \*6 The depth does not include the stabilizers for the stand.
- \*7 The height includes the stand.
- \*8 The weight does not include the ink, master roll, and stand.
  \*9 The pollution degree of the usage environment due to dirt and dust in the air. Degree "2" corresponds to a general indoor environment.

Notes: The specifications are subject to change without prior notice.

) and (ISO) are trademarks or registered trademarks of RISO KAGAKU CORPORATION in the United States and other countries.

RISO i QualitySystem" and are the trademarks of RISO KAGAKU CORPORATION. Other corporate names and/or trademarks are either registered trademarks or trademarks of each company, respectively.

Copyright ©2016 RISO KAGAKU CORPORATION. All rights reserved.



RISO, Inc. 800 District Ave, Suite 390 Burlington, MA 01803 http://us.riso.com/

For more details please contact: